

YH Series Solenoid Valve




Character


This product can be used under high pressure circumstance, safety, has been adopted widely in high pressure pneumatic equipment such as Blow Bottle Machine, especially apply successfully in equipment that produce special shape, big capacity polyurethane bottle.

- YH23JD-8
- YH23JD-15
- YH23JD-15P₂

Ordering Code

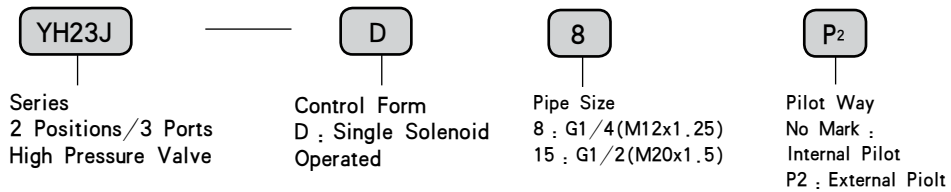

Graphics Sign

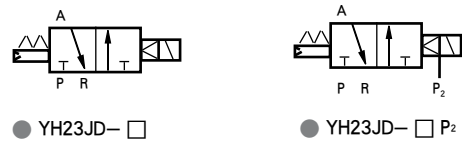


Technical Parameter

Item \ Specification	YH23JD-8	YH23JD-8P ₂	YH23JD-15	YH23JD-15P ₂
Pressure Range	0.15 ~ 2.4 MPa			
Medium Temperature	-5 ~ 60 °C			
Applicable Medium	Air			
Lubrication	Needless			
Nominal Diameter	8 mm		15 mm	
Direction Change Time	≤ 0.04 S		≤ 0.08 S	
Pipe Size	G1/4		G1/2	

YH Series Solenoid Valve


Figure Dimension

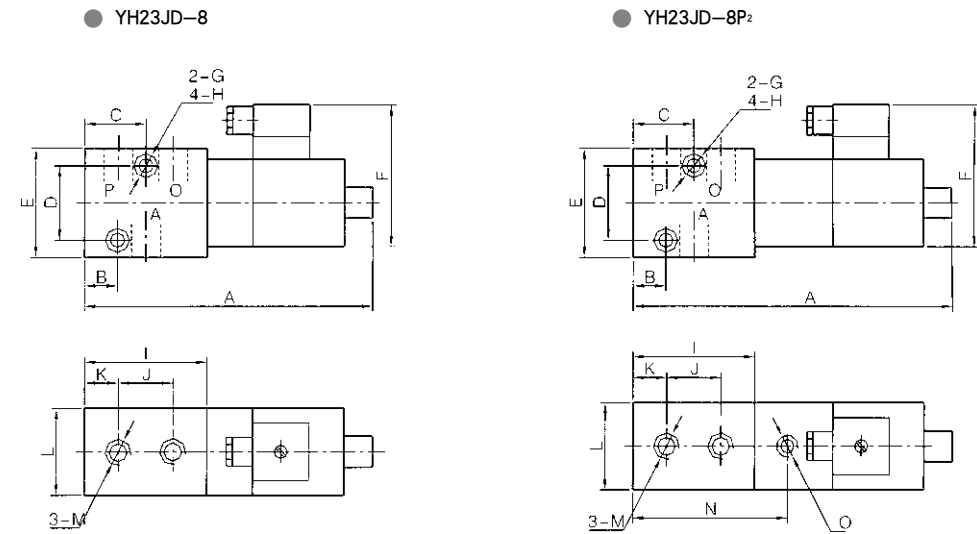

TYPE	K	A	B	C	D	E	F	G	H	I	J	K	L	N	O
YH23JD-8	G1/4	132	15	28	34	50	65	6.5	11	56	25	15.5	40	-	-
YH23JD-8P ₂	G1/4	145												75	G1/8

YH23JD-15

YH23JD-15P₂

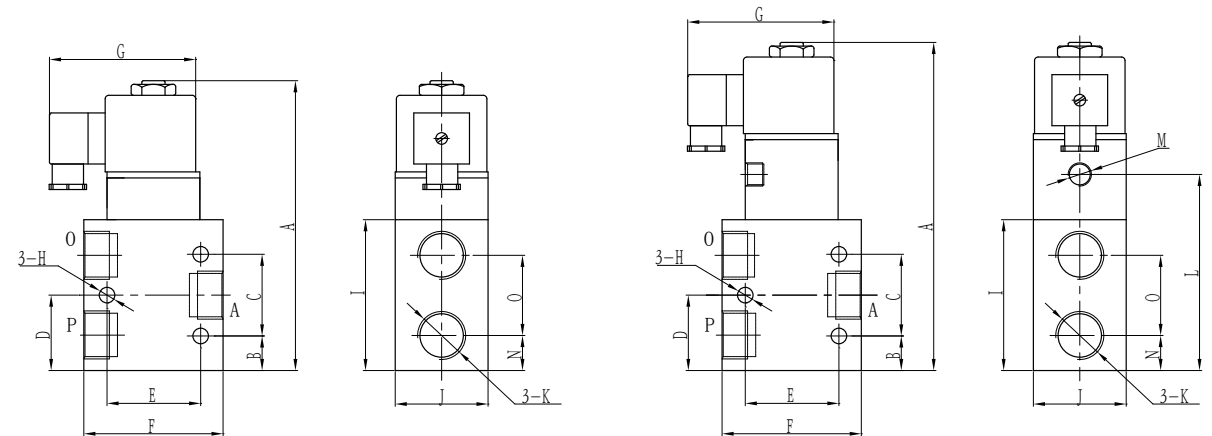

TYPE	K	A	B	C	D	E	F	G	H	I	J	L	M	N
YH23JD-15	G1/2	140	15.5	34	32.5	40	60	65	6.5	65	60	-	-	10.5
YH23JD-15P ₂	G1/2	157										84.5	G1/8	