

FG Series Manifold

Ordering Code

F	100	5T
series	Type	Number of Connector
	100: 1/4	1-16
	200: 1/4	1-16
	300: 3/8	1-16
	400: 1/2	1-16



F100-5T



F200-5T



F230-5T



F300-5T



TM-08



TM-06


Character

The high frequency valve of TM series have no influence of working pressure and the performance of large flow with low power for adopting the globe valve with structure of balanced pressure type. Any port of No.1,2,3 can be added pressure, act quickly and be used widely such as air blowing, single function cylinder driving, air current branching, pressure choice and vacuum equipments etc. It can be general used in both normal opened and normal closed.


Ordering Code

TM	06	AC220V
High Frequency Valve	Pipe Size 06 : G1/8 08 : G1/4	Standard Voltage DC12V DC24V AC110V AC220V


Graphics Sign




F100-5T

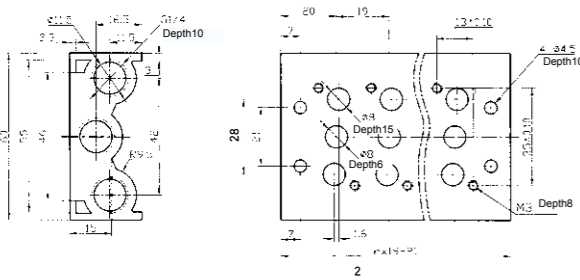


F200-5T

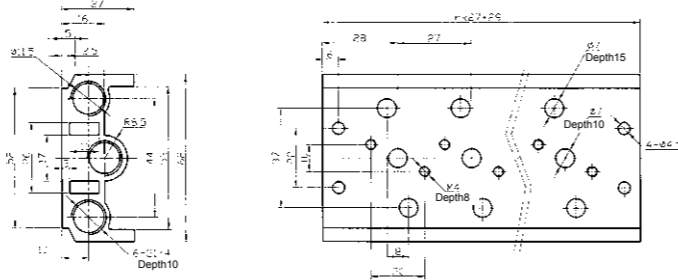

F230-5T

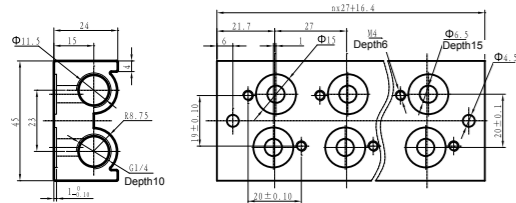

F300-5T

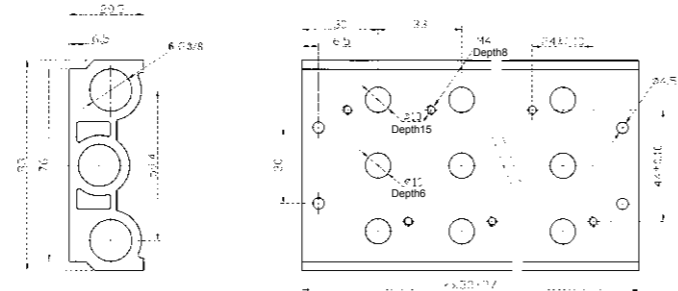


Technical Parameter

Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Frequency	Lubrication	Medium Temperature
TM-06	2 Positions/ 3Ports	G1/8	3	Air	0 ~ 0.8MPa	Internally Piloted	100 Cycles/Sec	Needless	-5 ~ 60°C
TM-08		G1/4	5						

Figure Dimension

TM-06

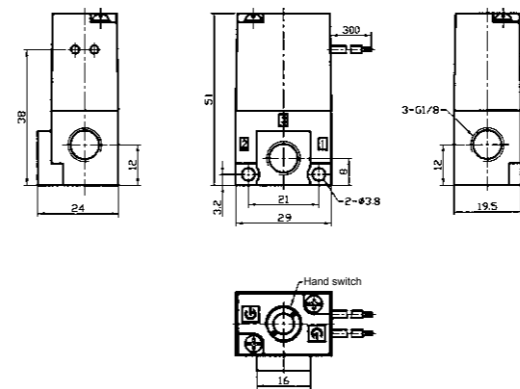

TM-08

