Solenoid Valve

Special Solenoid Valve for Door Pump Industry

● Character

It is a pneumatic valve controlled by micro electric signal, with small dimension, large fl ow, handsome shape,reliable performance and long service life. It can be installed in the integration.

● Ordering Code

TG	25	2	2	—	08	W	AC220V
Series	Function 25 : 2 positions/5 Ports	Connection Code 2 : 1/4	Control Form 2 : Double solenoid operated		Pipe size 08 : G1/4	Working form W : water test valve	Standard voltage DC24V AC110V AC220V

■ Technical Parameter

Specification \ Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Fequency	Lubrication	Medium Temperature
TG2522–08W	2 Positions/ 5Ports	G1/4	4.5	Air	0.15 ~ 0.8 MPa	Internally Piloted	5 Cycles/Sec	Needless	–5 ~ 60℃

■ Figure Dimension

● TG2522–08W

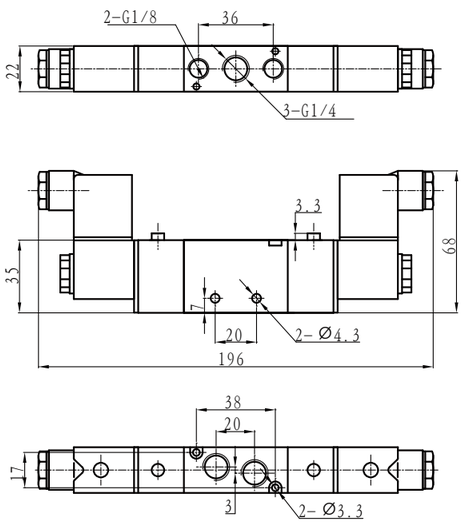

LHF Series Solenoid Valve

New

● Character

It is a pneumatic valve controlled by micro electric signal, with small dimension, large fl ow, handsome shape,reliable performance and long service life. It can be installed in the integration.

● Ordering Code

LHF	25	2	1	—	08	AC220V
Series	Function 25 : 2 positions/5 Ports	Connection Code 2 : 1/4	Control Form 1 : Single solenoid operated		Pipe size 08 : G1/4	Standard voltage DC24V AC110V AC220V

■ Technical Parameter

Specification \ Item	Function	Pipe Size	Nominal Diameter (mm)	Applicable Medium	Applicable Pressure Range	Operating Method	Max Action Fequency	Lubrication	Medium Temperature
LHF2521–08	2 Positions/ 5Ports	G1/4	7	Air	0.25 ~ 0.8 MPa	Internally Piloted	5 Cycles/Sec	Needless	–5 ~ 60℃

■ Figure Dimension
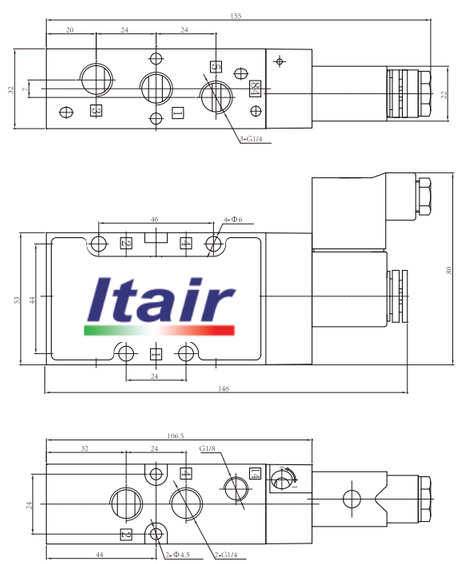
● LHF2521–08